



FASSI GROUP



PIAF 13RE

Vertical Mast Boom Lift

Built to last

MAIN FEATURES

| | |
|---------------------------|--------------------|
| Working height | 12,65 m / 41,50 ft |
| Horizontal outreach | 6,05 m / 19,85 ft |
| Gradeability | 30% |
| 0 Tail swing | |
| Electric drive | |



▲ STANDARD EQUIPMENT

- Non-marking rubber wheels
- Platform with protection bar
- 200kg load capacity
- 48V 260 Ah Battery
- On-board H/F charger
- Centralized battery filling
- Non-continuous 352° turret rotation
- 30% gradeability
- Possible to work at maximum height
- On-board diagnostic colour LCD console
- Sling and tow rings
- Battery charge indicator
- Tilt indicator with alarm
- Overload sensor
- Flashing lights
- Hour meter

★ ACCESSORIES & OPTIONS

- Easy access to the platform by an entry gate
- Compressed air line
- Power supply in the platform
- Automatic 110 / 220 V charger
- Movement cut off when tilt > 2°
- Motion alarm
- Food grade oil
- Biodegradable oil
- Motion and movement alarm
- Anti-crushing (ACS) system
- Customer colour(s) paint

PIAF 13RE

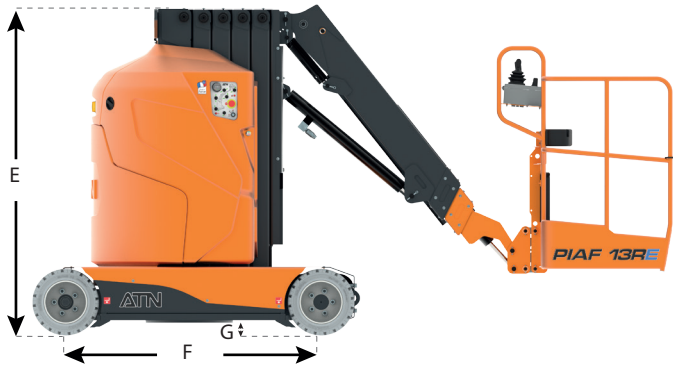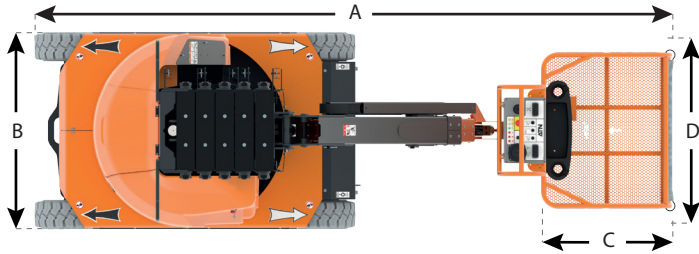

| | |
|--|--------------------|
| Working height | 12,65 m / 41,50 ft |
| Floor height | 10,65 m / 34,94 ft |
| Maximum horizontal outreach | 6,05 m / 19,85 ft |
| Load capacity (Interior, 2 people, wind 0 km/h) | 200 kg / 441 lbs |
| Load capacity ((Exterior, 1 people, wind < 45km/h) | 200 kg / 441 lbs |

| | |
|--------------------|-------------------|
| A Length | 3,72 m / 12,20 ft |
| B Width | 1,20 m / 3,93 ft |
| C Platform length | 0,80 m / 2,62 ft |
| D Platform width | 0,93 m / 3,05 ft |
| E Height | 1,98 m / 6,49 ft |
| F Wheelbase | 1,55 m / 5,08 ft |
| G Ground clearance | 8 cm / 0,26 ft |

| | |
|-----------------------------|------------------------|
| Turret rotation | 352° NC |
| Drive speed (stowed) | 6 km/h / 3,72 mph |
| Drive speed (raised) | 0,9 km/h / 0,56 mph |
| Gradeability (stowed) | 30% |
| Maximum tilt | 2° |
| Inside turning radius (Ri) | 0,66 m / 2,16 ft |
| Outside turning radius (Re) | 2,49 m / 8,16 ft |
| Total weight | 5140 kg / 11331 lbs |
| Ground pressure | 1750 kN/m ² |



This product complies with European regulations in force.
Due to our constant improvement policy, ATN reserves the right to
many any modifications without any prior notice.

RT : Working circle
Ri : Inside turning radius
Re : Outside turning radius

